

PRODUCT TECHNICAL DATASHEET

M90/F2ESO




CODE	DESCRIPTION	PCS/PALLET
M90/F2ESO	Pair of synchronized photocells series M90 adjustable version.	20

PRODUCT TECHNICAL SPECIFICATIONS


Standard power	12/24V AC 50Hz - 12/24V DC
Absorption	TX=19mA, RX=20mA
Operating temperature	-20+55°C
Protection level	IP55
Maximum distance in open field	10 - 15 m
Maximum number of photocells synchronized	2
Orientation angle	210 ° horizontal - 15 ° vertical
Relay contacts max current	0,5A RX
Relay contacts max voltage	30V
Installation Type	External
Maximum dimension product in mm (L x W x H)	130 x 45 x 40
Product weight packed (Kg)	0,3
Number items per pallet/box	20

PRODUCT DIMENSIONS AND PREPARING FOR INSTALLATION

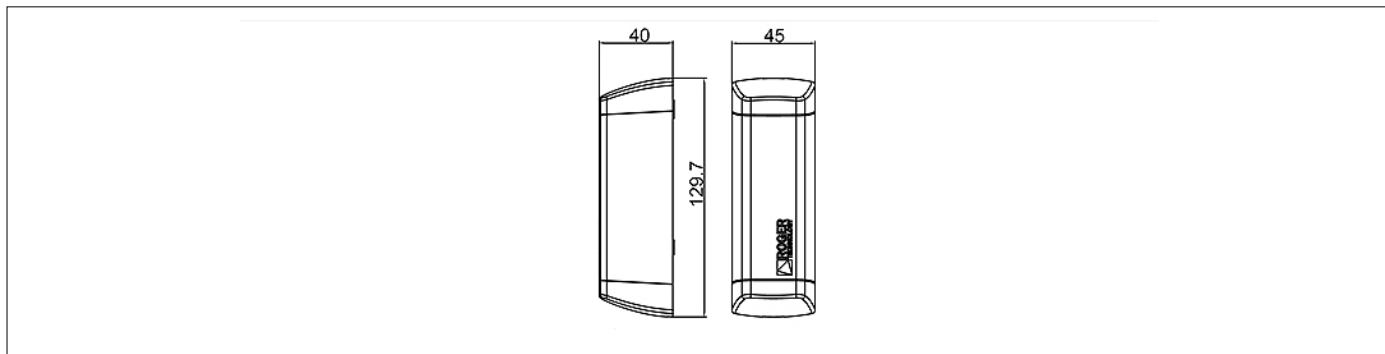

DIMENSIONS

PRODUCT PREPARING FOR INSTALLATION

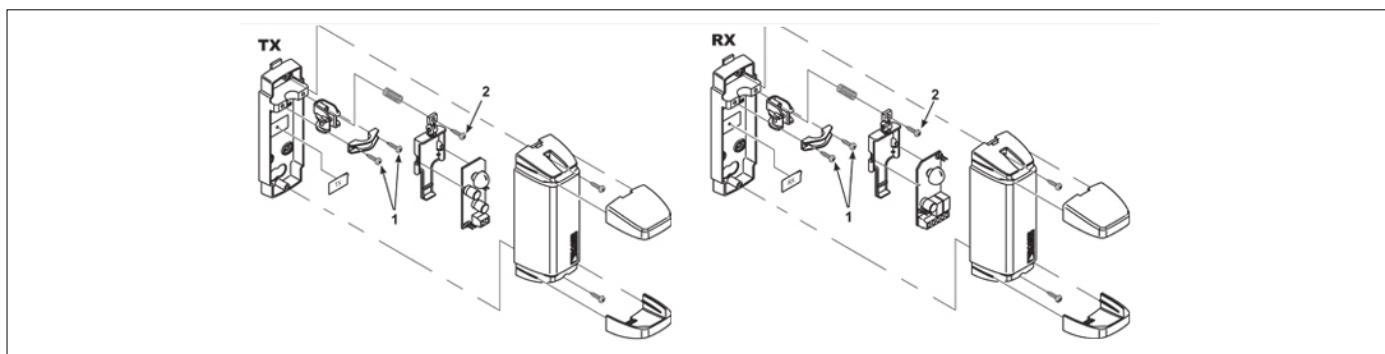

PREDISPOSITION FOR STANDARD INSTALLATION

PRODUCT ACCESSORIES



DEF/01
Pair of anti-vandal protection
shells for adjustable photocells
M90/F2ESO – M90/F4ESO.