

KIT PRODUCT TECHNICAL DATASHEET

SET C40/3301/HR




Composition SET C40/3301/HR

CODE	DESCRIPTION	QTY
KIT C40/1000	KIT C40 complete with control unit with integrated radio, motor and accessories for series guides C40. With 2 radio control E80/TX52R/2	1
	Composition KIT C40/1000	
	E80/TX52R/2 Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.	2
C40/G3300M/HR	Press-folded carbon steel track with on-board motor attachment, length 3300 mm with 6-wire reinforced belt (composed of 2pcs of 1650 mm each).	1

PRODUCT TECHNICAL SPECIFICATIONS


Power line supply	220V AC $\pm 10\%$ 50~60 Hz
Motor power supply	24V DC
Power rating	200W
Frequency of use	70%
Thrust	1000N
Operating temperature	-20+50°C
Protection level	IP40
Reductor Type	Irreversible
Manoeuvre speed	20 cm/s
Limit switch	Mechanical stopper in opening
Onboard control unit	YES
Encoder	Analogue with hall effect
Maximun opening	up to 2,6m
Guide length	3,3m
Product weight packed (Kg)	13

PRODUCT DIMENSIONS AND PREPARING FOR INSTALLATION

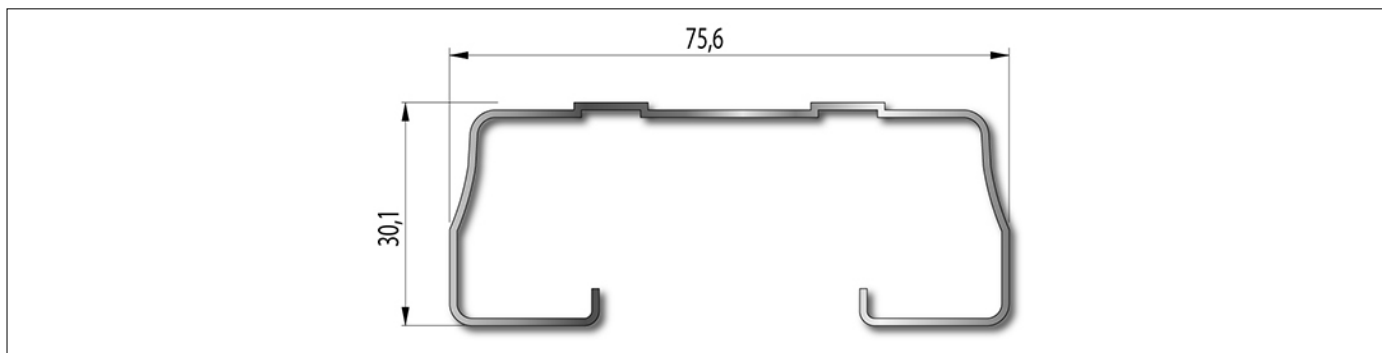

GUIDE SECTION

PRODUCT PREPARING FOR INSTALLATION

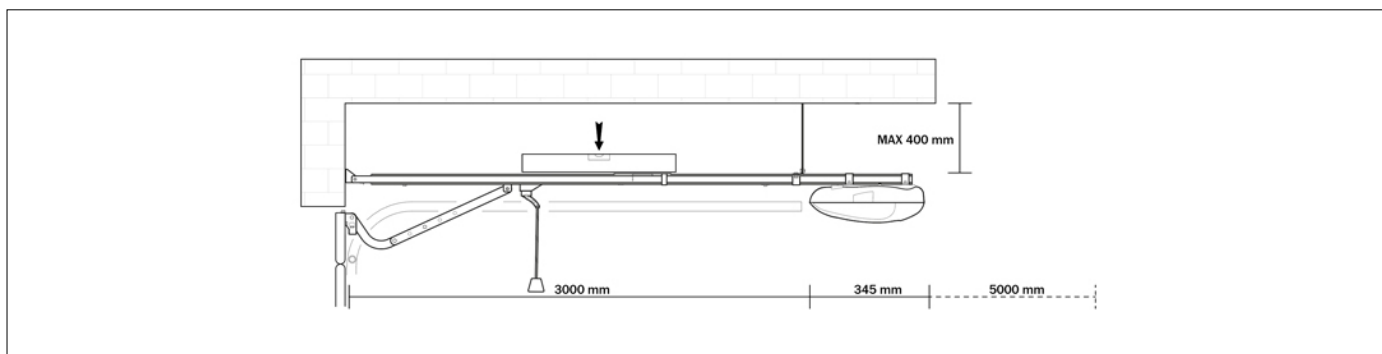


PREDISPOSITION FOR STANDARD INSTALLATION


PRODUCT ACCESSORIES



RL654
External manual release kit
without handle.



RL655
External manual release kit
with handle.



LT314
Pair of optional fixing brackets.